


**ALTERNATE CONNECTION AT SEWER MAIN**

(ONLY PERMITTED WHERE APPROVED BY ENGINEER)

1. WHERE PLUG IS PROVIDED ON RISER CLEANOUT, IT SHALL CONTAIN MAGNETIC MATERIAL SO THAT IT MAY BE LOCATED WITH A METAL DETECTOR.
2. CLEANOUTS SHALL NOT BE LOCATED IN SIDEWALKS OR DRIVEWAYS.
3. CLEANOUTS REQUIRED EVERY 50' OR AT CHANGE IN DIRECTION
4. 6" PVC SERVICE TO BE USED FOR MULTI-FAMILY DWELLINGS AND COMMERCIAL CONNECTIONS.  
4" PVC SERVICE TO BE USED FOR SINGLE FAMILY DWELLINGS.

**EXISTING MAIN CONNECTION**

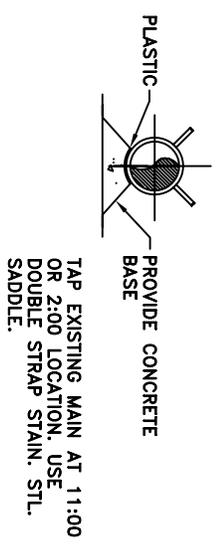

BY DATE	REVISIONS	<b>TOWNSHIP OF FLORENCE WATER &amp; SEWER DEPARTMENT</b>	<b>SANITARY SEWER TYPICAL LATERAL CONNECTION DETAIL</b>
		DATE : <b>6/05</b>	
		DWN BY :	<b>4</b>